

更加简单 · 放心

EASY CONTROL & SAFE DESIGN

操作简单 | Easy operation

采用7.5英寸
的彩色液晶触摸屏
7.5-inch color liquid crystal
touch panel

画面大,易操作。
Operation is easy on the big screen.

提高识别性
Improvement of visibility


操作面板按键根据不同功能进行配色,增强了识别度。
The color scheme of the operation sheet key was distinguished for every function, and visibility was improved.

步进动作
Step Feed Operation

使用步进操作,机械手一步一步实施被设定好的动作,可确认机械手的设定条件。
Step feed operation causes the Servo robot to execute the currently set operation step by step, allowing you to check the setting conditions of the Servo robot.

插入式用户可编程功能
Easy NC steps (User Program Editing)

NC程序的简易设定功能,在步进操作中可指定插入位置。
Features the simple NC step program settings. This makes it possible to designate positions for interruptions in mold changing operations.

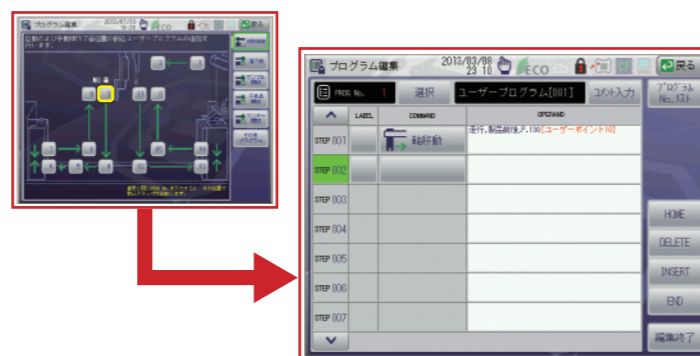

装载USB通信端口
USB communication port

与电脑连接便捷。
Allows PC connection.



ES-II系列操作盒 | ES-II SERIES CONTROLLER

STEC-NC2

放心·安全 | Relief · Safety

使用3段式动作可能键

3- Position Enabling Switch

根据人类工程学充分考虑安全的基础上,采用3段式动作可能键。

3-position enabling switch which considered the safety based on ergonomics is adopted as the key which can be operated.

采用SD内存卡

SD Memory Card

外部记忆存储采用SD卡。
SD card is adopted as an external memory.

能够记忆1000套模具的换模数据。
Recordable step changes (1000 molds)



1000 molds

EASY CONTROL & SAFE DESIGN